

FTD-TT- 65-487

AD620079

7165-63321


TRANSLATION

FREE-CUTTING STAINLESS STEEL

By

N. M. Pisarev and V. M. Kozhin

FOREIGN TECHNOLOGY DIVISION

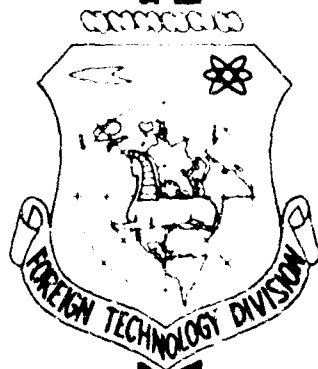

AIR FORCE SYSTEMS COMMAND

WRIGHT-PATTERSON AIR FORCE BASE

OHIO

CLEARINGHOUSE
FOR FEDERAL SCIENTIFIC AND
TECHNICAL INFORMATION

Hardcopy

Microfiche

1-00 80-505 pp. 127

ARCHIVE COPY

SEP 7 1965

TISIA B

This translation was made to provide the users with the basic essentials of the original document in the shortest possible time. It has not been edited to refine or improve the grammatical accuracy, syntax or technical terminology.

AD620079

UNEDITED ROUGH DRAFT TRANSLATION

FREE-CUTTING STAINLESS STEEL

BY: N. M. Pisarev and V. M. Kozhin

English pages: 2

SOURCE: Patent No. 155813 (Appl. No. 779510/22-2,
May 18, 1962), (Russian), 2 pages.

TA5001158

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION
FOREIGN TECHNOLOGY DIVISION
WP-APB, OHIO.

FREE-CUTTING STAINLESS STEEL

N. M. Pisarev
and
V. M. Kozhin

Free-cutting stainless steels intended for use in climatic conditions of middle latitudes (e.g., E1474 chrome steel used for making parts in transmitting mechanisms) are known.

4Kh18N2M (EI 378) steel with enhanced anticorrosion and mechanical properties suitable for operation under tropical climatic conditions is proposed. This steel is distinguished by the fact that together with an increased amount of sulfur and phosphorous, it contains molybdenum.

Composition for 4Kh18N2M Steel (in %):

Carbon	0.35 - 0.45
Chromium	16 - 18
Nickel	1.5 - 2.5
Manganese	0.7 - 1.2
Silicon	to 0.5
Molybdenum	0.7 - 0.9
Sulfur	0.15 - 0.25
Phosphorous	0.08 - 0.15

After hardening from a temperature of $1030 - 1050^{\circ}\text{C}$ and tempering at a temperature of $150 - 200^{\circ}\text{C}$, 4Kh18N2M free-cutting steel takes on the following mechanical properties: hardness H_{RC} 48 - 52; strength 168 kg/mm^2 ; specific elongation $\delta = 7\%$; impact strength $a_K = 0.8 \text{ kg/cm}^2$.

The technique of preparing 4Kh18N2M steel presents no difficulties; the steel deforms well in the hot state in the temperature range of $1150 - 850^{\circ}\text{C}$.

Object of Invention

Free-cutting stainless steel containing 0.35 - 0.45% carbon, 16 - 18% chromium, 1.5 - 2.5% nickel, 0.7 - 1.2% manganese and up to 0.5% silicon is distinguished by the fact that, in order to enhance the mechanical and anticorrison properties, 0.7 - 0.9% molybdenum, 0.15 - 0.25% sulfur and 0.08 - 0.15% phosphorous are introduced.